# **Type K2 Thin Film Pressure** Transducer

### **APPLICATIONS:**

Hydraulic, machine tool, test and measurement, and all general purpose industrial process applications

### **BENEFITS & FEATURES:**

- 0.5% and 1.0% accuracy
- Vac.-2000 psi pressure range
- · Superior long-term stability and repeatability
- Stainless steel NEMA 4X enclosure
- · Conditioned millivolt output
- Wide range of pressure and electrical connections available

The Ashcroft® K2 transducer introduces the benefits of polysilicon thin film performance at affordable prices. Modern low-pressure chemical vapor deposition methods provide simple, stable molecular bonds between a proven metal diaphragm and a polysilicon strain gage bridge. There are no epoxies or bonding agents to contribute to signal instability or drift.

The integral metal diaphragm and polysilicon bridge are virtually unaffected by shock, vibration or mounting.

These transducers are offered in many standard pressure ranges with high-quality millivolt output signal ratiometric to supply voltage. Trans-



ducer performance is directly traceable to the National Institute of Standards and Technology and specifications are conservatively stated. A calibration test certificate is available with each transducer.

### **PERFORMANCE CHARACTERISTICS**

Cto.	ndord	Ranges	(nei)
งเสเ	iuaru	Kanues	(DSI)

0/15*	0/300	0/5000*	vac./60*
0/30*	0/500	0/7500*	vac./45*
0/60*	0/750	0/10,000*	vac./30*
0/100	0/1000	0/15,000*	vac./15*
0/150	0/2000	0/20,000*	vac./0*
0/200	0/3000		

1% accuracy ranges only.

Consult factory for nonstandard ranges

donibuit lactory for floriblation	ira rangos.	
Accuracy Class (F.S.):	<u>0.5%</u>	<u>1%</u>
(Using T.P. method)		
Best fit straight line (BFSL)	$\pm 0.25$	$\pm 0.4$
Hysteresis	±0.15	$\pm 0.2$
Nonrepeatability	$\pm 0.05$	$\pm 0.07$
Interchangeability	±0.5%	±1.0%

**Durability:** 108 cycles 20/80%F.S. with negligible performance change

Stability: ±0.5% F.S./yr

### **ENVIRONMENTAL CHARACTERISTICS**

### Temperature Limits:

-65/+250°F Storage: Operating: -20/+180°F Compensated -20/+160°F

# Thermal Coefficients: (68°F ref.) %F.S./°F

Otanuaru.			
	0.5%	<u>1%</u>	
ZER0	±0.028%	$\pm 0.04\%$	
SPAN	±0.028%	$\pm 0.04\%$	
Optional:			
7ĖD∩	⊥∩ ∩1 /10/	NI/A	

SPAN ±0.014% N/A

Multiply zero thermal coefficients by 1.5 on 0/30 psi range and by 3 and 0/15 and vac/0 ranges **Humidity:** 

No performance effect at 95% relative humidity - noncondensing

### **FUNCTIONAL CHARACTERISTICS**

### Overpressure Limits (F.S.):

-	0/15-	0/3000-	0/7500-	
	0/2000	0/5000	20,000	
roof	200%	150%	120%	
Burst	800%	300%	150%	

Less than ±0.1%F.S. effect for 0-2000 Hz at 20 g's in any axis

## Shock:

Less than ±0.05 F.S. effect for 100 g's, 20 ms shock in any axis

Position Effect: Less than 0.01% F.S.

### **ELECTRICAL SPECIFICATIONS**

### Sensitivity:

2mV/V 3mV/V 10mV/V 20mV/V

Power Requirements: 5-10 Vdc regulated Zero Offset:

 $\pm 0.5\%$  F.S. or  $\pm 1\%$  F.S. dependent on accuracy class

Response Time: Less than 5 ms **Circuit to Case Insulation Resistance:** 

100 M ohms @ 50 Vdc

### **PHYSICAL CHARACTERISTICS**

### Enclosure: NEMA 4X

(NEMA 1 only if <500 psig if electrical termination is Bendix® or Hirschman®)

Weight: 2 oz. (approx. w/o cable)

### **MATERIALS:**

Case: 300 series stainless steel

Cable: No. 24 AWG, 36" PVC, shielded, vented,

**UL** approved

Diaphragm: 17-4 PH stainless steel **Standard Process Connections:** (316 stainless steel)

1/8 NPT male or female 1/4 NPT male or female


1/4 SAE-J-514 male 1/4 AMINCO female required for pressures over 10,000 psi

Other connections available

Shunt calibration feature is available as an option. Calibration report is standard with 0.5% and optional with 1% accuracy units. Consult factory for pricing, availability and required minimums for nonstandard products.

Bendix® is a registered trademark of Amphenol Corp. Hirschman® is a registered trademark of Richard Hirschman of America Inc.

### TO ORDER THIS TYPE K2 TRANSDUCER:

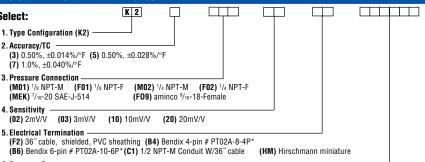

6. Pressure Range (Vac./0) Vac./0 through (2000) 20,000 psi (see standard ranges). Call for more options.

\*Mating connector available as necessary