


*Maximum  
Sensor Protection*

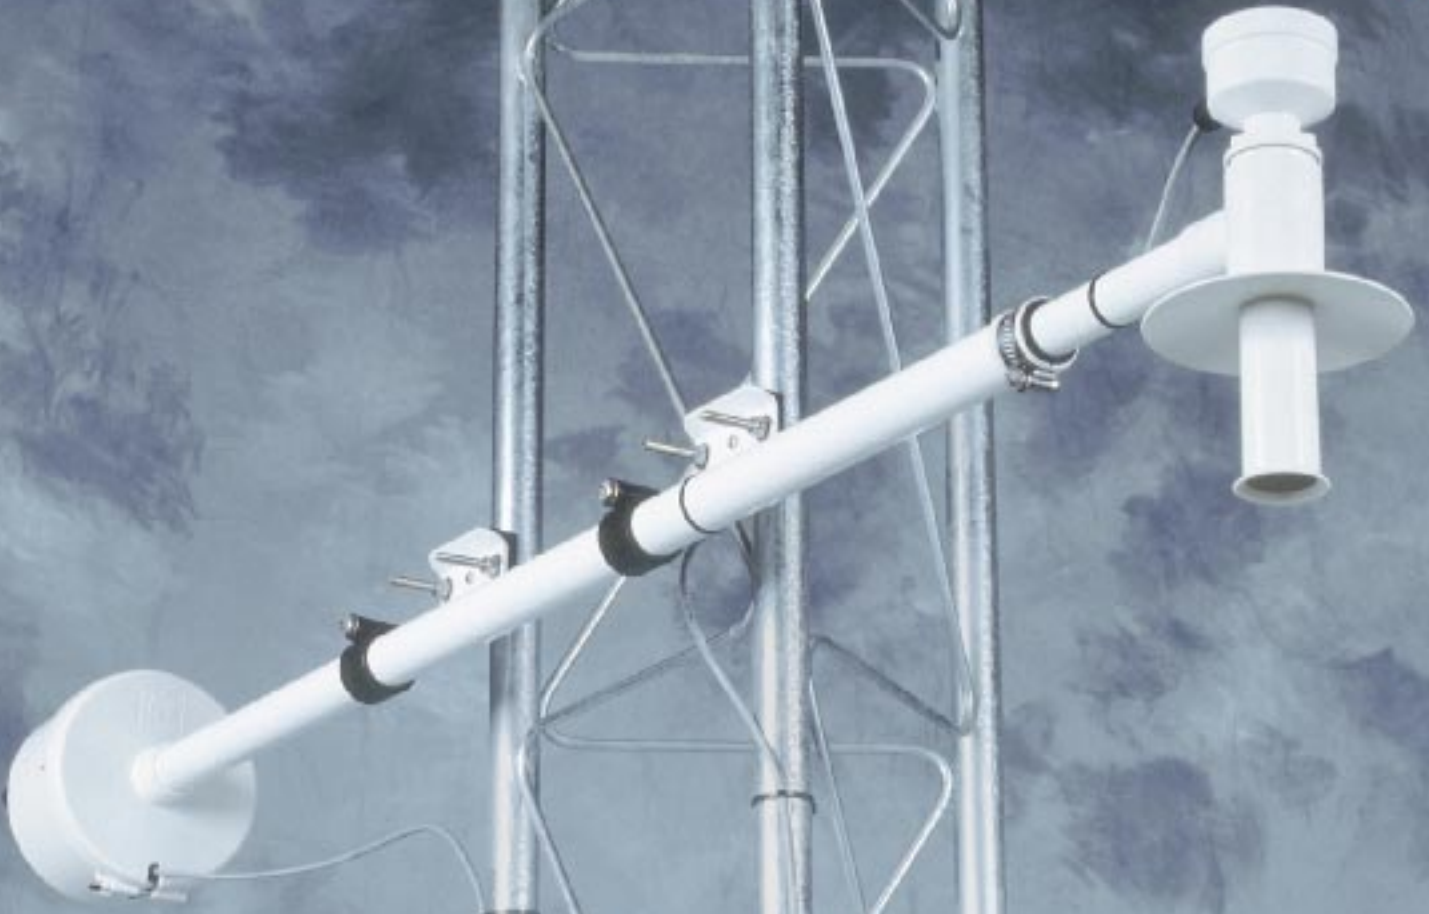

Model 43408  
**Gill Aspirated Radiation Shield**

**The Gill Aspirated Radiation Shield provides maximum sensor protection from incoming short wave solar radiation and outgoing long wave radiation.**

The shield employs concentric downward facing intake tubes and a small canopy shade to isolate the sensor from direct and indirect radiation. A continuous duty blower draws ambient air through the intake tubes and across the sensor minimizing heat transfer to the sensor. Compact shield components reduce radiation-absorption and improve aspiration efficiency. Specially selected plastic materials provide high reflectivity, low conductivity, and maximum weatherability.

The versatile DC blower is designed for continuous duty of 80,000 hours at 25°C. Brushless electronic commutation is achieved using dependable solid state circuitry.



The Temperature Probe is a 1000 Ω Platinum RTD encased in a stainless steel protective sheath. The sensing element is secured in a convenient junction box that fits YOUNG radiation shields. The probe is available with various output options. The 4-20 mA current output is useful in high noise, industrial settings or for long cable lengths. The 0.1 VDC option provides a calibrated voltage output signal.

The Relative Humidity / Temperature Probe combines a high accuracy humidity sensor and a 1000 Ω Platinum RTD. Available with 0-1 VDC or 4-20 mA outputs, sensors are mounted in a common junction box.



## Specifications

### Sensor Types:

Accommodates temperature and humidity sensors up to 19 mm (.75 in) diameter

### Radiation Error:

@ 1000 W/m<sup>2</sup> intensity  
Ambient Temperature: 0.2° C (0.4° F) RMS  
Delta T: 0.05° C (0.1° F) RMS with like shields equally exposed.

### Aspiration Rate:

3.4 to 7.6 m/s (11 to 25 fps) depending on sensor size.

### Construction:

UV stabilized thermoplastic shield, white.  
Aluminum cross tube & mounting brackets, white painted.  
Stainless Steel U-bolt clamp

### Dimensions:

Length: 110-190 cm (43-75 in) adjustable.  
Shield: 34 mm (1.3 in) dia. x 10 cm (4 in) length.  
Blower Housing: 15 cm (5.9 in) dia. x 9 cm (3.5 in) length.  
Mounting: Adjustable V-blocks and U-bolts fit vertical, horizontal or diagonal tower members 25-50 mm (1-2 in) dia.

### Power Requirement:

12 VDC @ 500 mA for blower.  
AC adapter included.

### Weight:

Net weight- 2.4 kg (5.3 lb)  
Shipping weight- 5.9 kg (13 lb)

## MODEL 41342 Platinum Temp. Probe

### Sensor Type:

1000 Ω Platinum RTD

### Accuracy:

±0.3° C at 0° C .....(standard)  
±0.1° C at 0° C .....(optional)

### Available Outputs:

4 wire RTD .....(41342)  
4-20 mA .....(41342L)  
0-1 VDC .....(41342V)

## MODEL 41372 Rel. Humidity/Temp. Probe

### Sensor Type:

Temperature: .....1000 Ω Platinum RTD  
Humidity: .....Capacitive Polymer

### Accuracy:

Temperature:  
±0.3° C at 0° C ..... (standard)  
±0.1° C at 0° C .....(optional)  
Humidity:.....3% from 0 to 100% RH

### Available Outputs:

4-20 mA .....(41372L)  
0-1 VDC .....(41372V)

## Ordering Information

## MODEL

<b>GILL ASPIRATED RADIATION SHIELD- WITH 110V / 60 HZ AC ADAPTER</b> .....	<b>43408</b>
<b>GILL ASPIRATED RADIATION SHIELD- WITH 230V / 50-60 HZ AC ADAPTER</b> .....	<b>43408H</b>
<i>Note: Standard unit supplied with blank mounting plug. Plug may be drilled to order (26 mm max.)</i>	
<b>TEMPERATURE PROBE- RTD OUTPUT</b> .....	<b>41342</b>
<b>4-20 mA OUTPUT*</b> .....	<b>41342L*</b>
<b>0-1 VDC OUTPUT*</b> .....	<b>41342V*</b>
<b>RELATIVE HUMIDITY/TEMPERATURE PROBE*</b>	
<b>4-20 mA OUTPUT*</b> .....	<b>41372L*</b>
<b>0-1 VDC OUTPUT*</b> .....	<b>41372V*</b>
<b>*SPECIFY TEMPERATURE SCALING FOR PROBES:</b>	
-50 to +50 C° .....	<b>413***C</b>
-50 to +150 F° .....	<b>413***F</b>
<b>ACCESSORY JUNCTION BOX</b> <i>Specify sensor diameter (10 mm max.)</i> .....	<b>41390</b>



J & S Instruments, Inc.  
3071 State Route 72 South  
Springfield, OH 45505-5023

Phone 937-325-7499  
Fax 937-323-9588  
sales@jsinstruments.com